



outdoor blinds

installation guide

Tool:

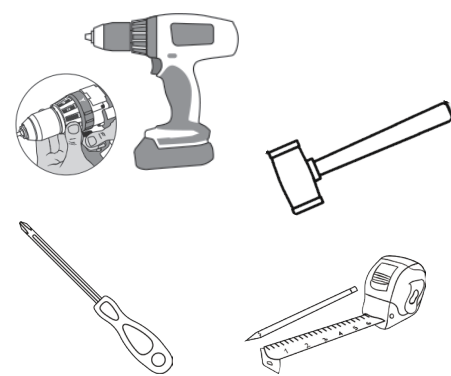


overall structure drawing:

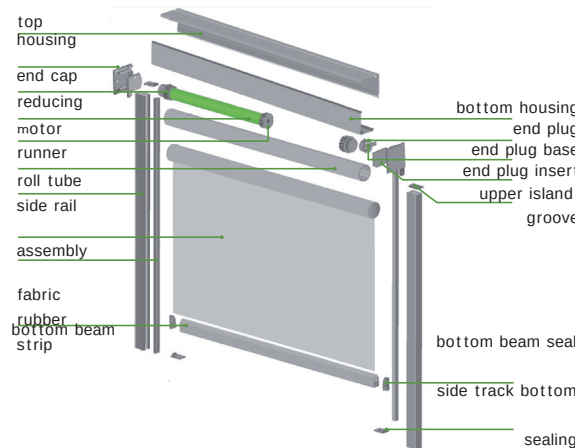


1

open the package and get following materials

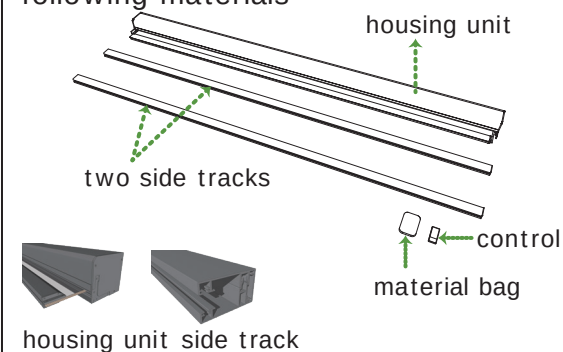


2

Use a wrench to take out the bottom seals of two side rails

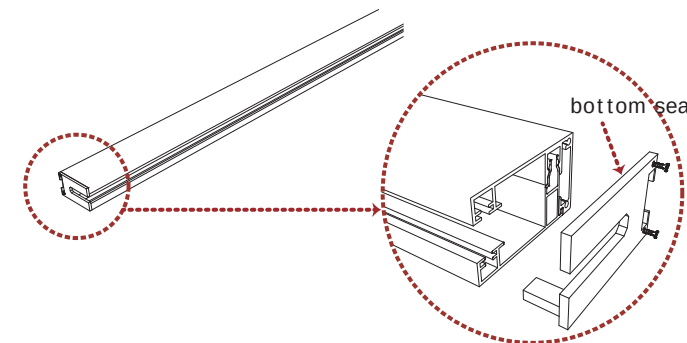


3

Pry open the side rail with a wrench to get the parts

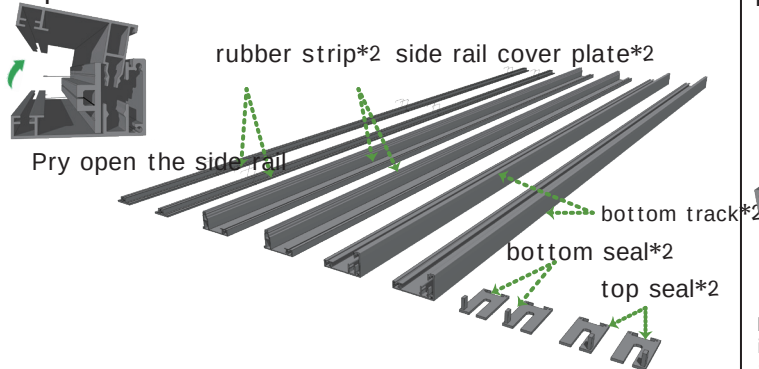


4

Confirm the installation type: frame-mounted or surface-mounted

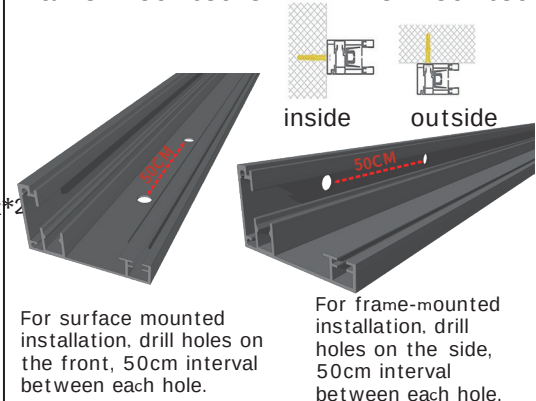


5

Detach the housing and mount the end plate insert (not required for 100-type)

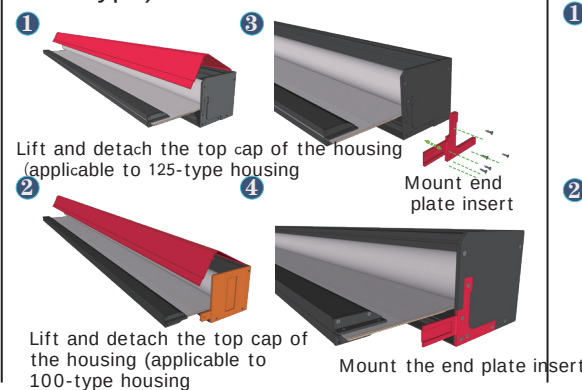


6

Mount the upper end cap and lower end cap, pay attention to differentiate left and right sides

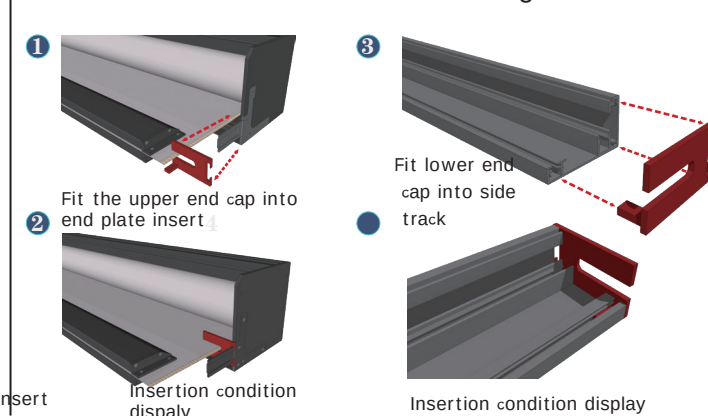


7

Insert bottom side rail into slot, connect with housing, both sides installed synchronously

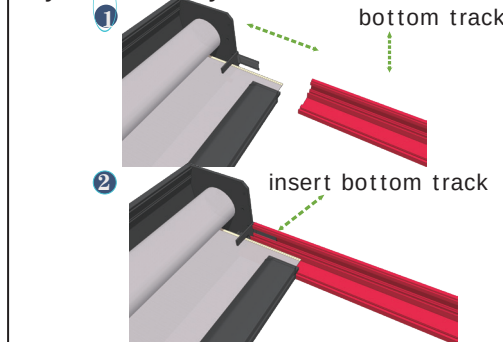


8

Position roller blinds at mounting location, temporarily fixed with screws

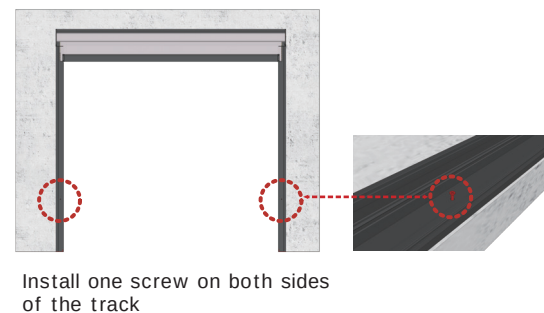


9

Verify upper and lower ends of side rail remain horizontal; side rail vertical to housing (tolerance < 3mm). Secure with screws once confirmed.

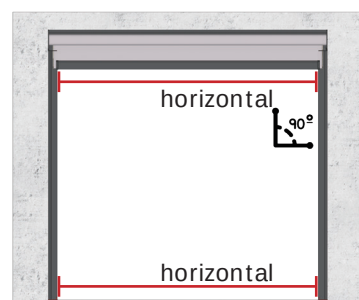


10

Insert rubber strip through fabric zipper, then fit entire unit into side track.

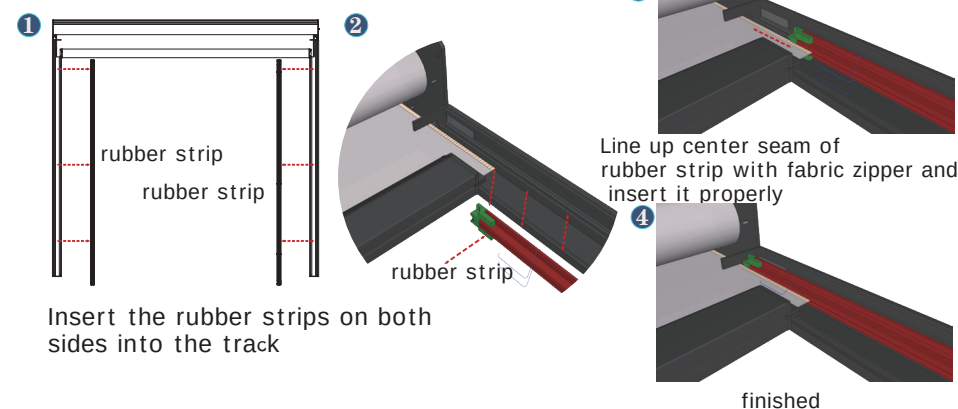


11

Mount side track cover and fasten securely

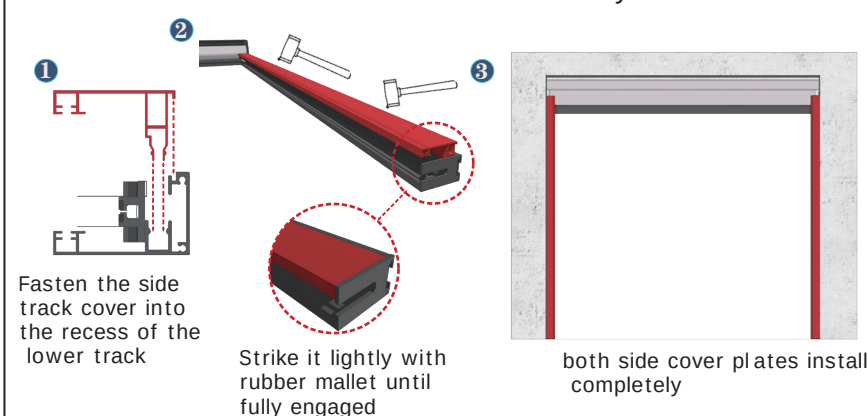


12

Once the side rail cover snapped securely, ensure all spring wires are seated in the grooves

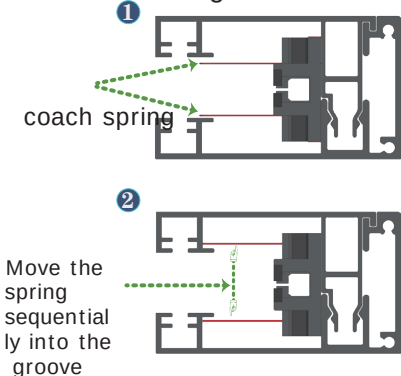


13

Switch on the power; conduct a trial operation

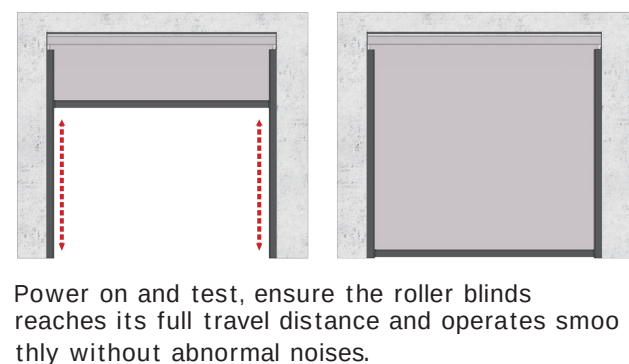


14

Install the motor cover, snap it securely along the groove

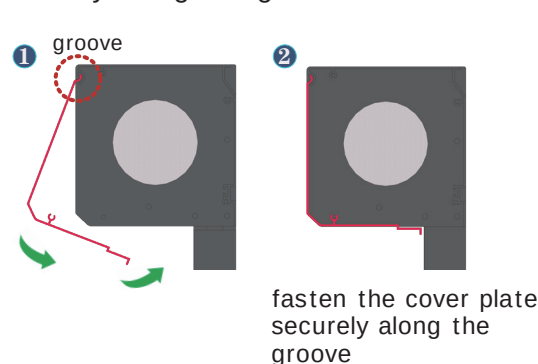

15

Finish

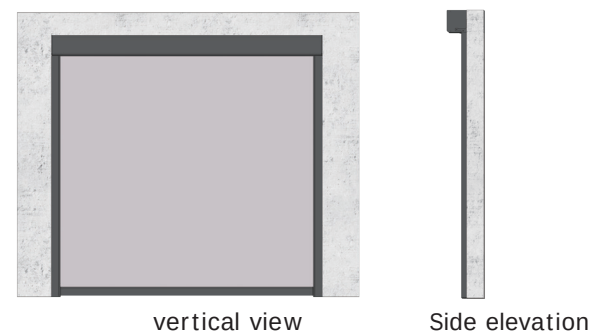

16

Power wire and connection



Drawing instruction

